
1. ADA STOREFRONT THRESHOLD

NTS · TEMPLATE REFERENCE; ARCHITECT TO VERIFY PROJECT APPLICATION

DOOR_STOREFRONT_THRESHOLD

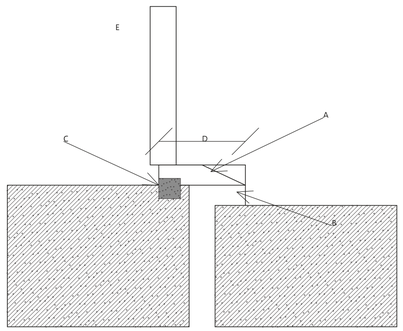

A: ALUM THRESHOLD, S.S. FASTENERS
B: BEVEL 1:2 OVER 1/4"
C: CONT. SEALANT BED
D: 1/2" MAX HT
E: ADA THRESHOLD

INSTALLER RESPONSIBILITIES

1. INSTALLER: SET ALUMINUM THRESHOLD IN CONT. SEALANT ON SLAB
2. INSTALLER: ANCHOR THRESHOLD W/ STAINLESS FASTENERS, COUNTERSUNK
3. INSTALLER: BEVEL CHANGE IN LEVEL OVER 1/4" AT 1:2 MAX SLOPE
4. INSTALLER: SEAL THRESHOLD-TO-FRAME JOINTS CONTINUOUS


MAX THRESHOLD HEIGHT: 1/2" (1/4" VERT + 1/4" BEVEL)
BEVEL SLOPE: 1:2 MAX ABOVE 1/4"
CLEAR WIDTH: 32" MIN. AT DOOR
SEALANT BED: CONT. UNDER + AT JAMBS

13 17 27 31

2. DOOR TYPE A: UNIT ENTRY

NTS · MODEL OPENING STUDY; ARCHITECT TO VERIFY PROJECT APPLICATION

DOOR_TYPE_A · CW-1 1 HR



A: TYPE A
B: 3'-0" x 6'-8"

OPENING RECORD

RATING: 20-MIN FIRE DOOR, D-20 (TABLE 716.1(2))
VISION LITE: NONE
HARDWARE: SET HS-1
DOORS: 57 ON THE ELEMENT FILE

3. DOOR TYPE B: UNIT ENTRY

NTS · MODEL OPENING STUDY; ARCHITECT TO VERIFY PROJECT APPLICATION

DOOR_TYPE_B · CW-1 1 HR

A: TYPE B
B: 3'-0" x 7'-0"

OPENING RECORD

RATING: 45-MIN FIRE DOOR, D-H-45 (TABLE 716.1(2))
VISION LITE: NONE
HARDWARE: SET HS-1
DOORS: 6 ON THE ELEMENT FILE

4. DOOR TYPE C: UNIT ENTRY

NTS · MODEL OPENING STUDY; ARCHITECT TO VERIFY PROJECT APPLICATION

DOOR_TYPE_C · DW-2 1 HR

A: TYPE C
B: 3'-0" x 7'-0"

OPENING RECORD

RATING: 45-MIN FIRE DOOR, D-H-45 (TABLE 716.1(2))
VISION LITE: NONE
HARDWARE: SET HS-1
DOORS: 1 ON THE ELEMENT FILE

5. DOOR TYPE D: UNIT ENTRY

NTS · MODEL OPENING STUDY; ARCHITECT TO VERIFY PROJECT APPLICATION

DOOR_TYPE_D · EW-1 0 HR

A: TYPE D
B: 6'-0" x 7'-0"

OPENING RECORD

RATING: NONE REQUIRED (HOST WALL 0 HR)
VISION LITE: NONE
HARDWARE: SET HS-1
DOORS: 2 ON THE ELEMENT FILE

6. DOOR TYPE E: UNIT ENTRY

NTS · MODEL OPENING STUDY; ARCHITECT TO VERIFY PROJECT APPLICATION

DOOR_TYPE_E · SF-1 2 HR

A: TYPE E
B: 3'-6" x 7'-0"

OPENING RECORD

RATING: 90-MIN FIRE DOOR, D-H-90 (TABLE 716.1(2))
VISION LITE: NONE
HARDWARE: SET HS-1
DOORS: 1 ON THE ELEMENT FILE

SHEET NOTES

1. DOORS: SPECIFIED IN SECTIONS 08 11 00, 08 14 00, 08 41 13, 08 71 00.

KEYNOTES

1. SEALANT JOINT - SEE DETAIL: SECTION 07 92 00
2. BUILDING WRAP - LAP PER MANUFACTURER: SECTION 07 25 00
3. 1-HR FIRE-RATED ASSEMBLY - SEE SCHEDULE: SECTION 09 21 00
4. FIRE CAULK ALL JOINTS IN RATED ASSEMBLY: SECTION 07 84 00

NOT PROVIDED — BY OTHERS
APPLICANT / OWNER

CONSULTANTS

STRUCTURAL	NOT PROVIDED — BY OTHERS
CIVIL	NOT PROVIDED — BY OTHERS
MECHANICAL	NOT PROVIDED — BY OTHERS
PLUMBING	NOT PROVIDED — BY OTHERS
ELECTRICAL	NOT PROVIDED — BY OTHERS
LANDSCAPE	NOT PROVIDED — BY OTHERS
FIRE PROTECTION	NOT PROVIDED — BY OTHERS
GEOTECHNICAL	NOT PROVIDED — BY OTHERS

REVIEW

Prepared for review by the design professional of record. Not for construction or permit submission.

PROJECT

Architecture.Engineering — L courtyard study

FICTIONAL STUDY: NO REAL PARCEL
ARCHITECTURE.ENGINEERING — L COURTYARD STUDY
OCCUPANCY R-2, M · CONSTRUCTION NOT PROVIDED — BY OTHERS · STORIES 4

REVISIONS

MARK	DATE	DESCRIPTION

REGISTER

Project	AE-STUDY-L01
Issue	NOT PROVIDED — BY OTHERS
Date	NOT PROVIDED — BY OTHERS
Drawn	NOT PROVIDED — BY OTHERS
Scale	NTS
Phase	CONSTRUCTION DOCUMENTS

OPEN ISSUE

The set's open issue is stated on the cover, G0.01.

DOOR DETAILS (CONT.)

SHEET

A8.08