
INTERIOR MISCELLANEOUS DETAILS

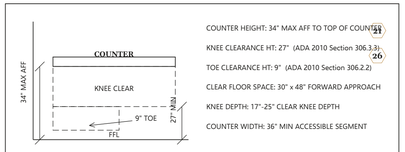

COUNTER HEIGHT: 34" MAX AFF TO TOP OF COUNTER (21)

KNEE CLEARANCE HT: 27" (ADA 2010 Section 306.3.3) (26)

TOE CLEARANCE HT: 9" (ADA 2010 Section 306.2.2)


CLEAR FLOOR SPACE: 30" x 48" FORWARD APPROACH

KNEE DEPTH: 17"-25" CLEAR KNEE DEPTH

COUNTER WIDTH: 36" MIN ACCESSIBLE SEGMENT

- PROVIDE FORWARD APPROACH KNEE + TOE CLEARANCE
- ACCESSIBLE SEGMENT ON ACCESSIBLE ROUTE
- NO SHARP EDGES AT KNEE SPACE

1 / A9.5 **ACCESSIBLE COUNTER**



HEADER: CURVED GWB OVER FLEXIBLE TRACK (47)

ARCH RADIUS: SEE PLAN, TYP. 18" TO 36" R


SOFFIT DEPTH: MATCH WALL THICKNESS, GWB WRAP

CORNER BEAD: FLEXIBLE ARCH CORNER BEAD AT CURVE

GWB: 1/4" FLEXIBLE GWB AT TIGHT RADII

- USE FLEXIBLE TRACK TO FORM ARCH PROFILE
- DOUBLE-LAYER 1/4" GWB FOR TIGHT RADIUS
- SAND CORNER BEAD SMOOTH, LEVEL 4 FINISH

2 / A9.5 **ARCHED OPENING**

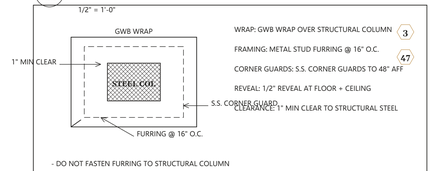

WRAP: GWB WRAP OVER STRUCTURAL COLUMN (3)

FRAMING: METAL STUD FURRING @ 16" O.C.


CORNER GUARDS: S.S. CORNER GUARDS TO 48" AFF (47)

REVEAL: 1/2" REVEAL AT FLOOR + CEILING

CLEARANCE: 1" MIN CLEAR TO STRUCTURAL STEEL

- DO NOT FASTEN FURRING TO STRUCTURAL COLUMN
- MAINTAIN FIRE RATING OF COLUMN ASSEMBLY
- ALIGN REVEALS WITH ADJACENT WALL PLANES

3 / A9.5 **COLUMN WRAP**

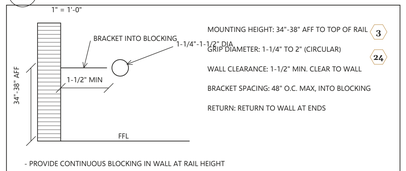

MOUNTING HEIGHT: 34"-38" AFF TO TOP OF RAIL (3)

GRIP DIAMETER: 1-1/4" TO 2" (CIRCULAR) (24)


WALL CLEARANCE: 1-1/2" MIN. CLEAR TO WALL

BRACKET SPACING: 48" O.C. MAX, INTO BLOCKING

RETURN: RETURN TO WALL AT ENDS

- PROVIDE CONTINUOUS BLOCKING IN WALL AT RAIL HEIGHT
- STAINLESS OR POWDER-COAT ALUMINUM, SEE FINISH SCHEDULE

4 / A9.5 **CORRIDOR HANDRAIL**

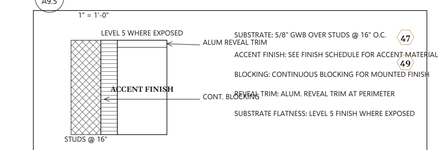

SUBSTRATE: 5/8" GWB OVER STUDS @ 16" O.C. (47)

ACCENT FINISH: SEE FINISH SCHEDULE FOR ACCENT MATERIAL (49)


BLOCKING: CONTINUOUS BLOCKING FOR MOUNTED FINISH

REVEAL TRIM: ALUM. REVEAL TRIM AT PERIMETER

SUBSTRATE FLATNESS: LEVEL 5 FINISH WHERE EXPOSED

- PROVIDE BLOCKING SIZED FOR FINISH WEIGHT
- COORDINATE REVEAL LAYOUT WITH ELEVATIONS
- VERIFY SUBSTRATE COMPATIBILITY WITH FINISH

5 / A9.5 **FEATURE WALL**

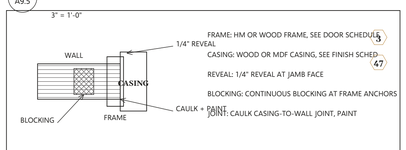

FRAME: HM OR WOOD FRAME, SEE DOOR SCHEDULE (5)

CASING: WOOD OR MDF CASING, SEE FINISH SCHED (47)

REVEAL: 1/4" REVEAL AT JAMB FACE

BLOCKING: CONTINUOUS BLOCKING AT FRAME ANCHORS

JOINT: CAULK CASING-TO-WALL JOINT, PAINT

- PROVIDE BLOCKING AT HINGE + STRIKE LOCATIONS
- MITER CASING CORNERS, GLUE + NAIL
- SHIM FRAME PLUMB BEFORE ANCHORING

6 / A9.5 **INTERIOR DOOR CASING**

KEYNOTES

21	01 10 00 ACCESSIBLE MOUNTING HEIGHT - SEE ADA REQUIREMENTS	**26**	06 41 00 KNEE AND TOE CLEARANCE PER ADA
47	09 21 00 GWB FINISH - SEE FINISH SCHEDULE	**3**	06 10 00 PROVIDE BLOCKING AS REQUIRED FOR MOUNTING
24	01 10 00 ACCESSIBLE ROUTE - MAINTAIN 36" MIN. CLEAR WIDTH	**49**	06 41 00 CASEWORK PER INTERIOR ELEVATION

SHEET NOTES

1. GENERAL REQUIREMENTS: SPECIFIED IN SECTION 01 10 00.

KEYNOTES

1. PROVIDE BLOCKING AS REQUIRED FOR MOUNTING: SECTION 06 10 00
2. ACCESSIBLE MOUNTING HEIGHT - SEE ADA REQUIREMENTS: SECTION 01 10 00
3. ACCESSIBLE ROUTE - MAINTAIN 36" MIN. CLEAR WIDTH: SECTION 01 10 00
4. KNEE AND TOE CLEARANCE PER ADA: SECTION 06 41 00
5. GWB FINISH - SEE FINISH SCHEDULE: SECTION 09 21 00
6. CASEWORK PER INTERIOR ELEVATION: SECTION 06 41 00

NOT PROVIDED — BY OTHERS
APPLICANT / OWNER

CONSULTANTS

STRUCTURAL	NOT PROVIDED — BY OTHERS
CIVIL	NOT PROVIDED — BY OTHERS
MECHANICAL	NOT PROVIDED — BY OTHERS
PLUMBING	NOT PROVIDED — BY OTHERS
ELECTRICAL	NOT PROVIDED — BY OTHERS
LANDSCAPE	NOT PROVIDED — BY OTHERS
FIRE PROTECTION	NOT PROVIDED — BY OTHERS
GEOTECHNICAL	NOT PROVIDED — BY OTHERS

REVIEW

Prepared for review by the design professional of record. Not for construction or permit submission.

PROJECT

Architecture.Engineering — L courtyard study

FICTIONAL STUDY: NO REAL PARCEL
ARCHITECTURE.ENGINEERING — L COURTYARD STUDY
OCCUPANCY R-2, M · CONSTRUCTION NOT PROVIDED — BY OTHERS · STORIES 4

REVISIONS

MARK	DATE	DESCRIPTION

REGISTER

Project	AE-STUDY-L01
Issue	NOT PROVIDED — BY OTHERS
Date	NOT PROVIDED — BY OTHERS
Drawn	NOT PROVIDED — BY OTHERS
Scale	AS NOTED
Phase	CONSTRUCTION DOCUMENTS

OPEN ISSUE

The set's open issue is stated on the cover, G0.01.

INTERIOR MISCELLANEOUS DETAILS

SHEET

A9.5