
1. WEEP SCREED AT BASE OF WALL

NTS - TEMPLATE REFERENCE; ARCHITECT TO VERIFY PROJECT APPLICATION

SIDING_WALL_BASE

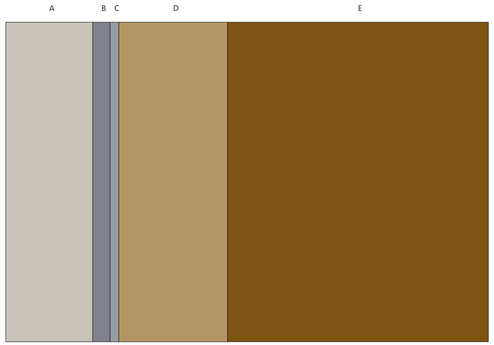

A: CLADDING: 0.5 IN
B: WRB: 0.1 IN
C: WEEP SCREED: 0.05 IN
D: EXTERIOR SHEATHING: 0.625 IN
E: SILL PLATE / FRAMING: 1.5 IN

INSTALLER RESPONSIBILITIES

1. INSTALLER: SET WEEP SCREED AT BASE, 4" ABOVE GRADE / 2" ABOVE PAVING (11)
2. INSTALLER: LAP WRB OVER VERTICAL LEG OF SCREED, SHINGLE FASHION (12)
3. INSTALLER: INSTALL LATH + CLADDING DOWN TO SCREED, LEAVE WEEP SLOTS CLEAR (18)
4. INSTALLER: MAINTAIN DRAINAGE PLANE TO WEEP, DO NOT SEAL BOTTOM EDGE (19)

CLEAR TO GRADE: 4" MIN. EARTH, 2" MIN. PAVING
WEEP SCREED: GALV. / ALUM., 3-1/2" FLANGE
WRB LAP: OVER SCREED LEG, SHINGLE
DRAINAGE GAP: MAINTAIN TO WEEP SLOTS

SHEET NOTES

1. CLADDING: SPECIFIED IN SECTION 07 46 00.

KEYNOTES

1. SELF-ADHERED MEMBRANE FLASHING AT OPENING: SECTION 07 65 00
2. WEEP SCREED AT BASE OF WALL: SECTION 09 24 00
3. VAPOR RETARDER - SEE SPECIFICATIONS: SECTION 07 26 00
4. BACKER ROD AND SEALANT - TYP.: SECTION 07 92 00

NOT PROVIDED — BY OTHERS
APPLICANT / OWNER

CONSULTANTS

STRUCTURAL	NOT PROVIDED — BY OTHERS
CIVIL	NOT PROVIDED — BY OTHERS
MECHANICAL	NOT PROVIDED — BY OTHERS
PLUMBING	NOT PROVIDED — BY OTHERS
ELECTRICAL	NOT PROVIDED — BY OTHERS
LANDSCAPE	NOT PROVIDED — BY OTHERS
FIRE PROTECTION	NOT PROVIDED — BY OTHERS
GEOTECHNICAL	NOT PROVIDED — BY OTHERS

REVIEW

Prepared for review by the design professional of record. Not for construction or permit submission.

PROJECT

Architecture.Engineering — L courtyard study

FICTIONAL STUDY: NO REAL PARCEL
ARCHITECTURE.ENGINEERING — L COURTYARD STUDY
OCCUPANCY R-2, M · CONSTRUCTION NOT PROVIDED — BY OTHERS · STORIES 4

REVISIONS

MARK	DATE	DESCRIPTION

REGISTER

Project	AE-STUDY-L01
Issue	NOT PROVIDED — BY OTHERS
Date	NOT PROVIDED — BY OTHERS
Drawn	NOT PROVIDED — BY OTHERS
Scale	NTS
Phase	CONSTRUCTION DOCUMENTS

OPEN ISSUE

The set's open issue is stated on the cover, G0.01.

EXTERIOR SIDING DETAILS (CONT.)

SHEET

A8.12